
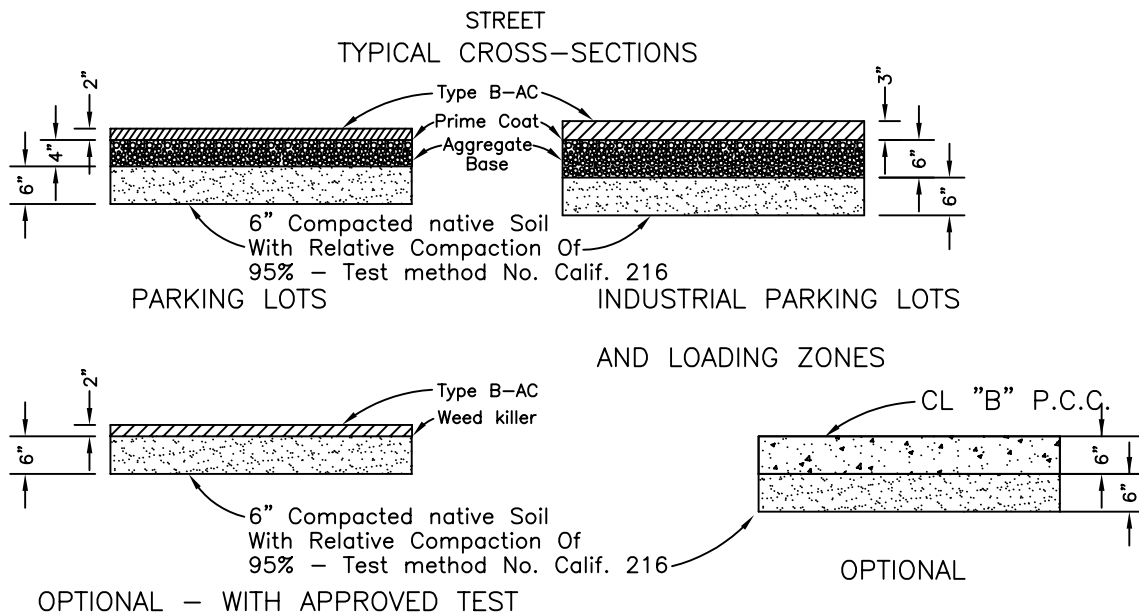


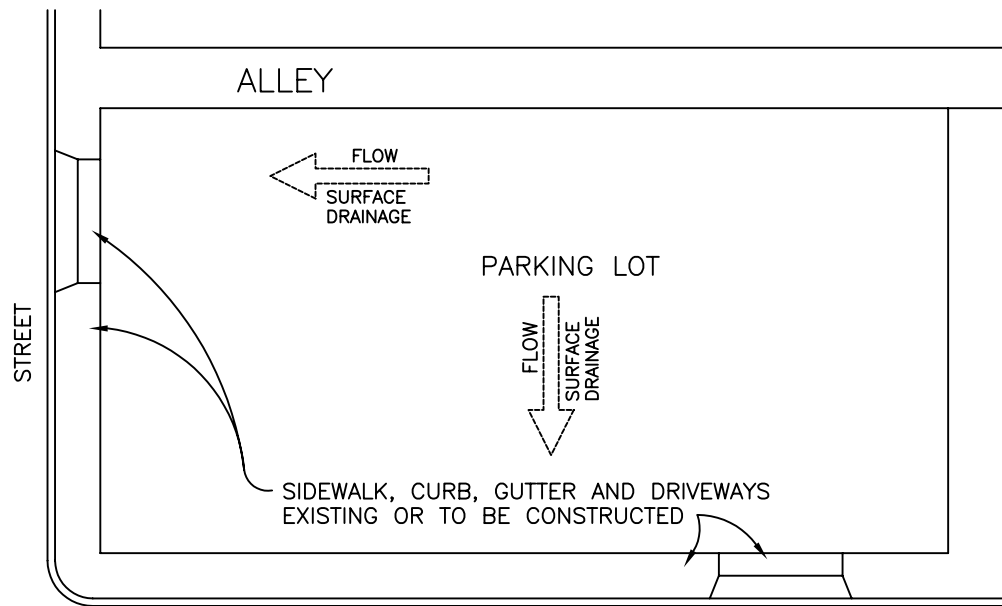

NOTES:

1. SURFACE DRAINAGE SHALL BE TO NEAREST STREET GUTTER.
2. THE OPTIONAL CROSS-SECTION MAY BE USED UPON SUBMISSION OF "R" VALUE TESTS TAKEN BY AN APPROVED LABORATORY. THE MINIMUM "R" VALUE SHALL BE 80.
3. WEED KILLER SHALL BE APPLIED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS.
4. SURFACE DRAINAGE TO ALLEY MAY BE ALLOWED ONLY BY WRITTEN APPROVAL OF THE CITY ENGINEER. HALF OF ALLEY SHALL BE REPAVED AS REQUIRED BY CITY ENGINEER.
5. A COMPLETE DRAINAGE PLAN AND PARKING STALL LAYOUT SHALL BE SUBMITTED TO CITY ENGINEERING DEPARTMENT FOR APPROVAL PRIOR TO ANY CONSTRUCTION.